
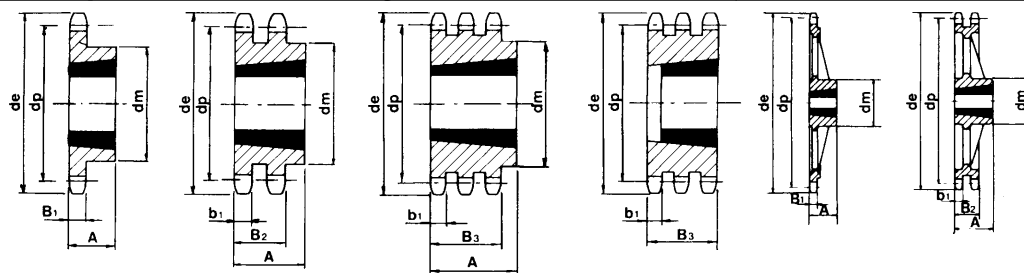


Řetězová kola s nábojem 1/2" x 5/16" (08B -1 -2 -3) pro Taper Lock® pro válečkové řetězy DIN 8187/ ISO R606

Materiál

viz. níže



Provedení 1 Provedení 2 Provedení 4 Provedení 5 Provedení 6 Provedení 7

1-řadé

Obj. číslo	Počet zubů z	de	dp	Pouzdro Taper Lock®	Provedení	dm	A
T 43979	15	66.5	61.80	1008	1	45	22
T 64990	16	69.9	65.10	1108	1	50	22
T 43980	17	74.5	69.11	1210	1	60	25
T 64991	18	78.0	73.14	1210	1	60	25
T 43981	19	82.5	77.15	1210	1	63	25
T 64992	20	86.0	81.19	1610	1	67	25
T 43982	21	90.6	85.21	1610	1	71	25
T 64993	22	94.1	89.24	1610	1	71	25
T 43983	23	98.7	93.26	1610	1	76	25
T 64994	24	102.1	97.29	1610	1	76	25
T 43984	25	106.7	101.32	1610	1	76	25
T 43985	27	114.8	109.39	1610	1	76	25
T 43986	30	126.9	121.49	2012	1	90	32
T 43987	38	159.2	153.79	2012	1	90	32
T 43989	57	237.1	230.54	2012	6	111	32
T 43990	76	313.9	307.33	2012	6	111	32

2-řadé

T 44053	15	66.5	61.80	1008	2	46	22
T 44054	17	74.5	69.11	1210	2	56	25
T 44055	19	82.5	77.15	1210	2	62	25
T 44056	21	90.6	85.21	1610	2	70	25
T 44057	23	98.7	93.26	1610	2	79	25
T 44058	25	106.7	101.32	2012	2	87	32
T 44059	27	114.8	109.39	2012	2	87	32
T 44060	30	126.9	121.49	2012	2	87	32
T 44061	38	159.2	153.79	2012	2	100	32
T 44063	57	237.1	230.54	2012	7	111	32
T 44064	76	313.9	307.33	2012	7	111	32

3-řadé

T 65019	15	66.5	61.80	1008	5	-	34.9
T 65020	17	74.5	69.11	1210	5	-	34.9
T 65021	19	82.5	77.15	1215	4	62	38.0
T 65022	21	90.6	85.21	1615	4	70	38.0
T 65024	23	98.7	93.26	1615	4	70	38.0
T 65025	25	106.7	101.32	2012	5	-	34.9
T 65026	27	114.8	109.39	2012	5	-	34.9
T 65027	30	126.9	121.49	2012	5	-	34.9
T 65028	38	159.2	153.79	2012	5	-	34.9

B1	B2	B3	r3	c	b1
7.2	21	34.9	13	1.3	7

Materiál:

Provedení 1, 2, 4, 5: Ocel C 43
Provedení 6, 7: Šedá litina

Poznámka:

Upínací pouzdra Taper Lock® viz. strana K 25 - K 29.

Rozměry uvedeny v mm.