


Řetězová kola s nábojem 3/4" x 7/16" (12B -1 -2 -3) pro Taper Lock® pro válečkové řetězy DIN 8187/ ISO R606

Materiál

viz. níže

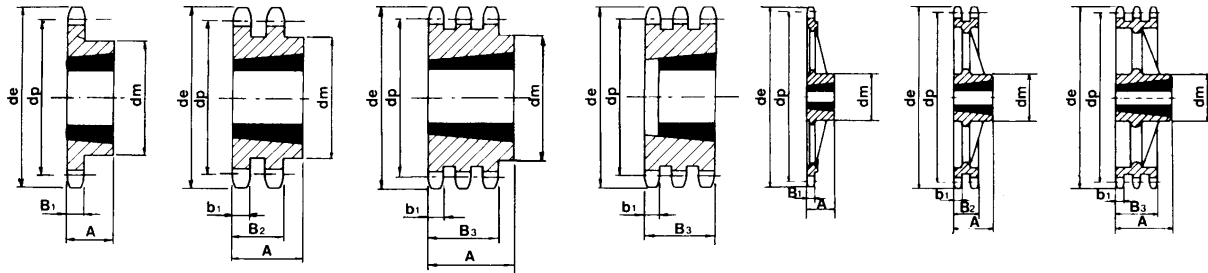

Provedení 1

Provedení 2

Provedení 4

Provedení 5

Provedení 6

Provedení 7

Provedení 8

1-řadé

Obj. číslo	Počet zubů z	de	dp	Pouzdro Taper Lock®	Provedení	dm	A
T 44008	13	87.8	79.60	1210	1	60	25
T 44009	15	99.8	91.62	1610	1	70	25
T 65000	16	105.8	97.65	1610	1	71	25
T 44010	17	111.9	103.67	1610	1	76	25
T 65001	18	117.9	109.71	2012	1	90	32
T 44011	19	123.9	115.73	2012	1	90	32
T 65002	20	130.0	121.78	2012	1	90	32
T 44012	21	136.0	127.81	2517	1	102	44
T 65003	22	142.0	133.86	2517	1	108	44
T 44013	23	148.1	139.90	2517	1	108	44
T 65004	24	154.1	145.94	2517	1	108	44
T 44014	25	160.2	151.99	2517	1	108	44
T 44015	27	172.3	164.09	2517	1	108	44
T 44016	30	190.4	182.24	2517	1	108	44
T 44017	38	238.9	230.69	2517	1	108	44
T 44019	57	355.9	345.81	2517	6	124	44
T 44020	76	471.1	460.99	2517	6	124	44

2-řadé

T 44076	15	99.8	91.62	1615	2	71	38
T 44077	17	111.9	103.67	1615	2	80	38
T 44078	19	123.9	115.73	2012	2	90	32
T 44079	21	136.0	127.81	2517	2	108	44
T 44080	23	148.1	139.90	2517	2	108	44
T 44081	25	160.2	151.99	2517	2	108	44
T 44082	27	172.3	164.09	2517	2	108	44
T 44083	30	190.4	182.24	2517	2	108	44
T 44084	38	238.9	230.69	3020	2	140	51
T 44086	57	355.9	345.81	3020	7	160	51
T 44087	76	471.1	460.99	3020	7	160	51

3-řadé

T 44104	15	99.8	91.62	1615	5	-	49.8
T 44105	17	111.9	103.67	1615	5	-	49.8
T 44106	19	123.9	115.73	2012	5	-	49.8
T 44107	21	136.0	127.81	2517	5	-	49.8
T 44108	23	148.1	139.90	2517	5	-	49.8
T 44109	25	160.2	151.99	2517	5	-	49.8
T 44110	27	172.3	164.09	3020	4	140	51.0
T 44111	30	190.4	182.24	3020	4	140	51.0
T 44112	38	238.9	230.69	3020	4	140	51.0
T 44114	57	355.9	345.81	3020	8	160	51.0

B1	B2	B3	r3	c	b1
11.1	30.3	49.8	19	2	10.8

Materiál:

Provedení 1, 2, 4, 5: Ocel C 43; 6 - 8: Šedá litina

Poznámka:

Upínací pouzdra Taper Lock® viz. strana K 25 - K 29.

Rozměry uvedeny v mm.