


Řetězová kola s nábojem 1" x 17.02 mm (16B -1 -2 -3) pro Taper Lock® pro válečkové řetězy DIN 8187/ ISO R606

Materiál

viz. níže

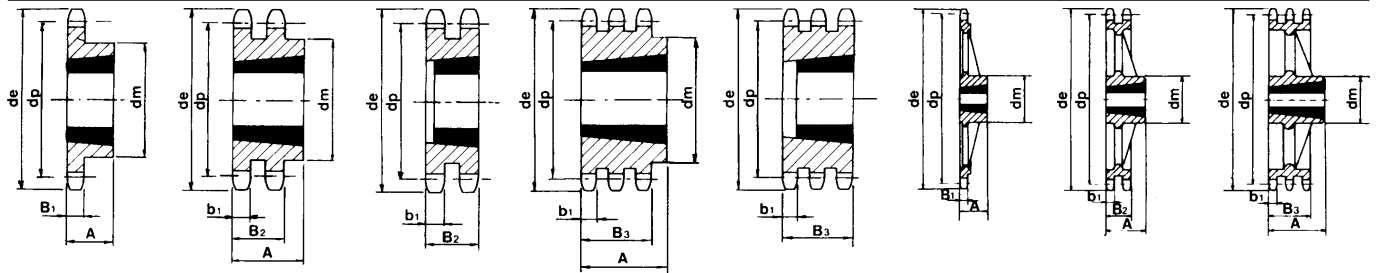

Provedení 1 Provedení 2 Provedení 3 Provedení 4 Provedení 5 Provedení 6 Provedení 7 Provedení 8

1-řadé

Obj. číslo	Počet zubů z	de	dp	Pouzdro Taper Lock®	Provedení	dm	A
T 44023	13	117.7	106.13	1615	1	73	38
T 44024	15	133.7	122.16	1615	1	76	38
T 65005	16	141.8	130.20	2012	1	90	32
T 44025	17	149.8	138.23	2012	1	90	32
T 65006	18	157.8	146.28	2517	1	108	44
T 44026	19	165.9	154.31	2517	1	108	44
T 65007	20	173.9	162.38	2517	1	110	44
T 44028	21	182.0	170.42	2517	1	110	44
T 65008	22	190.1	178.48	2517	1	110	44
T 44029	23	198.1	186.53	2517	1	110	44
T 65009	24	206.2	194.59	2517	1	110	44
T 44031	25	214.2	202.66	2517	1	110	44
T 44032	27	230.4	218.79	2517	1	110	44
T 44033	30	254.6	242.99	2517	1	120	44
T 44034	38	319.2	307.59	3020	6	160	51
T 44036	57	474.9	461.07	3020	6	160	51
T 44037	76	628.4	614.65	3020	6	160	51

2-řadé

T 44090	15	133.7	122.16	2012	3	-	47.7
T 44091	17	149.8	138.23	2517	3	-	47.7
T 44092	19	165.9	154.31	2517	3	-	47.7
T 44093	21	182.0	170.42	3020	2	140	51.0
T 44094	23	198.1	186.53	3020	2	140	51.0
T 44095	25	214.2	202.66	3020	2	140	51.0
T 44096	27	230.4	218.79	3020	2	140	51.0
T 44097	30	254.6	242.99	3030	2	140	76.0
T 44098	38	319.2	307.59	3030	7	160	76.0
T 44100	57	474.9	461.65	3535	7	178	89.0

3-řadé

T 44118	17	149.8	138.23	2517	5	-	79.6
T 44119	19	165.9	154.31	3030	5	-	79.6
T 44120	21	182.0	170.42	3030	5	-	79.6
T 44121	23	198.1	186.53	3535	4	159	89.0
T 44122	25	214.2	202.66	3535	4	175	89.0
T 44123	27	230.4	218.79	3535	4	175	89.0
T 44124	30	254.6	242.99	3535	4	175	89.0
T 44125	38	319.2	307.59	3535	8	178	89.0
T 44127	57	474.9	461.07	4040	8	216	102.0

B1	B2	B3	r3	c	b1
16.2	47.7	79.6	26	2.5	15.8

Materiál:

Provedení 1 - 5: Ocel C 43; 6 - 8: Šedá litina

Poznámka:

Upínací pouzdra Taper Lock® viz. strana K 25 - K 29.

Rozměry uvedeny v mm.