


Variátorové řemeny

průmyslové

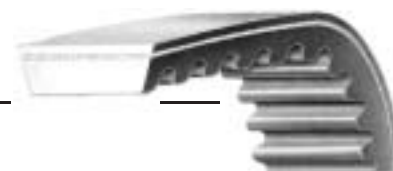

* nabídka Mitas

A B C			Srovnávací rozměry			
Označení řemenů			Srovnávací rozměry			
standartní	ISO 1604	RMA / MPTA	š x v	Li	Lw	La
52x16x1180				1180	1255	1280
		3226 V 505		1207	1282	1307
52x16x1250				1250	1325	1350
		3226 V 545		1309	1384	1409
52x16x1325	W50 1400*			1325	1400	1425
		3230 V 560		1347	1422	1447
	W50 1465*			1390	1465	1490
52x16x1400				1400	1475	1500
		3226 V 585		1410	1485	1510
		3230 V 585		1410	1485	1510
		3230 V 600		1449	1524	1549
	W50 1530*	3226 V 603		1455	1530	1555
52x16x1525	W50 1600*	3230 V 630		1525	1600	1625
		3226 V 650		1576	1651	1676
52x16x1600				1600	1675	1700
		3226 V 663		1609	1684	1709
	W50 1700*	3230 V 670		1625	1700	1725
52x16x1725	W50 1800*			1725	1800	1825
		3230 V 710		1729	1804	1829
		3226 V 723		1761	1836	1861
		3230 V 723		1761	1836	1861
		3230 V 750		1830	1905	1930
		3226 V 783		1913	1988	2013
52x16x1925				1925	2000	2025
		3230 V 800		1957	2032	2057
		3226 V 843		2066	2141	2166
		3230 V 850		2084	2159	2184
52x16x2162				2165	2240	2265
52x16x2240				2240	2315	2340
	W50 2500*			2425	2500	2525
		3432 V 450	54x16	1068	1143	1168
		3432 V 456		1083	1158	1183
		3432 V 480		1144	1219	1244
		3432 V 528		1266	1341	1366
		3432 V 534		1281	1356	1381
55x16x1400			55x16	1400	1475	1500
55x16x1500				1500	1575	1600
55x16x1600				1600	1675	1700
55x16x1700				1700	1775	1800
55x16x1800				1800	1875	1900
55x16x2000				2000	2075	2100
55x16x2240				2240	2315	2340
	W63 1600*		65x20	1506	1600	1631
	W63 1700*			1606	1700	1731
65x20x1706	W63 1800*			1706	1800	1831
65x20x1906				1906	2000	2031
	W63 2120*			2026	2120	2151
65x20x2146				2146	2240	2271
65x20x2406	W63 2500*			2406	2500	2531
65x20x2706				2706	2800	2831
		4430 V 530	70x18	1261	1346	1374
		4430 V 548		1306	1391	1419
		4430 V 555		1324	1409	1437
		4430 V 560		1337	1422	1450
		4430 V 570		1362	1447	1475
		4430 V 578		1383	1468	1496
		4430 V 600		1439	1524	1552
		4430 V 610		1464	1549	1577
		4430 V 630		1515	1600	1628
		4430 V 652		1571	1656	1684
70x18x1575				1575	1660	1688
		4430 V 660		1591	1676	1704
70x18x1600				1600	1685	1713
		4430 V 670		1616	1701	1729
		4430 V 690		1667	1752	1780
		4430 V 700		1693	1778	1806
70x18x1700				1700	1785	1813
		4430 V 710		1718	1803	1831
		4430 V 730		1769	1854	1882

A	B	C				
Označení řemenů			Srovnávací rozměry			
standartní	ISO 1604	RMA / MPTA	š x v	Li	Lw	La
70x18x1800				1800	1885	1913
		4430 V 750		1820	1905	1933
		4430 V 790		1921	2006	2034
		4430 V 800		1947	2032	2060
70x18x2000				2000	2085	2113
		4430 V 850		2074	2159	2187
70x18x2240				2240	2325	2353
70x18x2500				2500	2585	2613

Příklad objednávky:

variátorový řemen 26 x 8 x 525 Li 3 ks nebo W25 710 3 ks nebo 1422 V 420 3 ks

Minimální odběr:

zahraniční řemeny (kromě výjimek): bez omezení

zahraniční řemeny zakázkové: na poptávku

české řemeny: dle tabulky profilů